

interactiveDisplay: A package for enabling interactive visualization of Bioconductor objects

Shawn Balcome

April 24, 2017

Contents

List of Figures	2
1 Introduction	2
2 Installation	2
3 Support	3
4 Citation	3
5 Bioconductor Object Methods	4
5.1 <i>GRanges</i> and <i>GRangesList</i>	4
5.1.1 Object Background - <i>GRanges</i>	4
5.1.2 Object Background - <i>GRangesList</i>	5
5.1.3 Method	6
5.1.4 UI	6
5.1.5 Plots	8
5.1.6 Metadata Tabset	10
5.2 <i>ExpressionSet</i>	10
5.2.1 Object Background	10
5.2.2 Method	11
5.2.3 UI	11
5.2.4 Plots	14
5.2.5 GO Tabset	17
5.3 <i>RangedSummarizedExperiment</i>	18
5.3.1 Object Background	18
5.3.2 Method	19
5.3.3 UI	19
5.3.4 Plot	19
6 Additional Functions/Methods	20
6.1 Dataframe - <code>display()</code>	20
6.2 Dataframe - <code>simplenet()</code>	21
6.3 <code>gridsvgjs()</code>	21
7 Special Mention Components	21
7.1 Shiny	21
7.2 Gviz/ggbio	22
7.3 gridSVG	22
8 JavaScript Libraries	22
8.1 Data-Driven Documents	22
8.2 Zoom/Pan JavaScript libraries	22
8.3 JavaScript Color Chooser	23
9 Acknowledgments	23
10 SessionInfo	23
11 References	24

List of Figures

1	GRange, Chromosome drop-down menus	6
2	UCSC Genome drop-down, Suppress Ideogram checkbox	7
3	Plot Window Range slider, Length Filter slider, Choose a Strand drop-down	7
4	Deposit Ranges in View button, Clear Deposit button, Save to Console button	7
5	Static Circle Layout	8
6	Interactive Plot	8
7	All Ranges in Object	9
8	Selected Ranges in Current View	9
9	Deposited Selections	9
10	Dynamically Created Metadata Tabs	10
11	Experiment Info	11
12	Suppress Heatmap checkbox, Transpose Heatmap checkbox	12
13	Network/Dendrogram View dropdown	12
14	Group Wide GO Summary UI	12
15	Individual Probe GO Summary dropdown	12
16	Subset UI	13
17	Tweak Axis Label Font Size slider	13
18	Edge/Distance UI	13
19	Force Layout sliders	13
20	Clustering UI	14
21	Color Picker UI	14
22	Stop Application button	14
23	Heat Plot	15
24	Network View - Samples	15
25	Network View - Probes	16
26	Dendrogram - Samples	16
27	Dendrogram - Probes	17
28	Individual Probe GO Summary	17
29	Probe Cluster GO Summary	18
30	<i>RangedSummarizedExperiment</i> UI	19
31	Binned Mean Counts by Position	20
32	Dataframe Table	20
33	simplenet	21
34	gridSVG [5]	22

1 Introduction

interactiveDisplay makes use of Bioconductor visualization packages, the Shiny [8] web framework, the D3.js visualization JavaScript library, and other libraries to produce various web applications built around Bioconductor objects.

Four popular Bioconductor data objects are currently supported: *GRanges*, *GRangesList*, *ExpressionSet* and *RangedSummarizedExperiment*. In addition, the second April 2014 release version now includes a method for data frames and is imported by the AnnotationHub [1] package.

This vignette will provide some background and guidance on the use of the current supported methods.

2 Installation

The webpage for the release version of interactiveDisplay is available at:

<http://bioconductor.org/packages/release/bioc/html/interactiveDisplay.html>

And the development version is available at:

<http://bioconductor.org/packages/devel/bioc/html/interactiveDisplay.html>

It can also be installed within the R console using `biocLite()`.

```
source("http://bioconductor.org/biocLite.R")
biocLite("interactiveDisplay")
```

`interactiveDisplay` is actively maintained and it may be desirable to use the developer branch of the package. If the user is willing to install development versions of Bioconductor packages, this can be accomplished by toggling the setting with `useDevel()` and reinstalling packages with `biocLite()`. The development branch is actively changed, so users should expect to encounter errors. Generally, development and release versions of packages should not be mixed.

```
source("http://bioconductor.org/biocLite.R")
useDevel(TRUE)
biocLite("interactiveDisplay")
```

Because `interactiveDisplay` depends on many different R packages, some of which are used in only one individual method, many dependencies are suggested and will only be required when a method is run for the first time. This helps with load time when other packages (currently AnnotationHub) import methods from `interactiveDisplay`. If a required package is missing when a method is run, a message with instructions on obtaining it will be output in the R console.

3 Support

- Send me an email directly at balc0022@umn.edu
- Search, subscribe or contact the bioconductor or bioc-devel mailing lists at <http://www.bioconductor.org/help/mailling-list/>

4 Citation

```
citation("interactiveDisplay")
##
## To cite package 'interactiveDisplay' in publications use:
##
##   Shawn Balcome and Marc Carlson (2015). interactiveDisplay:
##   Package for enabling powerful shiny web displays of Bioconductor
##   objects. R package version 1.14.0.
##
## A BibTeX entry for LaTeX users is
##
##   @Manual{,
##     title = {interactiveDisplay: Package for enabling powerful shiny web displays of Bioconductor
## objects},
##     author = {Shawn Balcome and Marc Carlson},
##     year = {2015},
##     note = {R package version 1.14.0},
##   }
##
## ATTENTION: This citation information has been auto-generated from
## the package DESCRIPTION file and may need manual editing, see
```

```
## 'help("citation")'.
```

5 Bioconductor Object Methods

5.1 GRanges and GRangesList

5.1.1 Object Background - GRanges

The *GRanges* object is a standardized container for genomic location data used in many Bioconductor packages. It is built on S4 classes from the the infrastructure package IRanges.

First, load the libraries needed for the examples in this document and load the example *GRanges* data provided with the interactiveDisplay package.

```
options(width=80)
options(continue=" ")
suppressMessages(library(ggplot2))
suppressMessages(library(interactiveDisplay))
suppressMessages(library(Biobase))

data(mmgr)
mmgr

## Loading required package: GenomicRanges
## Loading required package: stats4
## Loading required package: S4Vectors
##
## Attaching package: 'S4Vectors'
## The following object is masked from 'package:base':
##
##   expand.grid
## Loading required package: IRanges
## Loading required package: GenomeInfoDb
## GRanges object with 1000 ranges and 2 metadata columns:
##           seqnames           ranges strand |           tx_id
##           <Rle>             <IRanges> <Rle> | <character>
## [1]      chr5 [ 53267178,  53278539] + |           27296
## [2]      chr2 [170346991, 170427845] - |           40171
## [3]      chr7 [  4472475,   4474584] + |           28623
## [4]      chr9 [123772185, 123790939] - |           37251
## [5]      chr7 [127588698, 127603605] + |           28623
## ...      ...
## [996]     chr5 [129715558, 129718290] + |           24633
## [997]     chr4 [115915120, 115939926] - |           27296
## [998]     chr4 [116598492, 116599164] + |           27296
## [999]     chr5 [124552958, 124560784] + |           37251
## [1000]    chr2 [170482708, 170497145] - |           40171
##           tx_name
##           <character>
```

```
##      [1] ENSMUST00000147148
##      [2] ENSMUST00000172093
##      [3] ENSMUST00000084338
##      [4] ENSMUST00000109152
##      [5] ENSMUST00000038824
##      ...
## [996] ENSMUST00000148260
## [997] ENSMUST00000147148
## [998] ENSMUST00000148260
## [999] ENSMUST00000038824
## [1000] ENSMUST00000172093
## -----
## seqinfo: 9 sequences from an unspecified genome
```

Each row in the *GRanges* object represents an individual range using the *IRanges* Bioconductor object to store the first and last position on the sequence. The chromosome and strand designation are both stored using run-length encoding (rle) for efficiency. The sequence lengths of are also stored in the *GRanges*. Any columns to the right of the pipe symbols in the object are metadata columns. Practically any R data object can be stored in the metadata, it is left up to the user and is often dependent on the experimental context of the data that is being conformed to the *GRanges* standard. For instance, to represent interactions between ranges, it is possible to store a *GRanges* object within another *GRanges* object's metadata. In the example here, transcript information has been inserted in the metadata.

5.1.2 Object Background - *GRangesList*

The *GRangesList* class is a container for storing a list of *GRanges* objects, the class is produced with the function `GenomicRangesList()`.

```
grl <- GenomicRangesList(list(mmgr,mmgr))
```

GRangesList objects are useful for compound objects, an example given in the documentation being spliced transcripts that are made up of exons [4]

```
data(mmgrl)
mmgrl

## GRangesList object of length 3:
## $gr1
## GRanges object with 189 ranges and 2 metadata columns:
##      seqnames      ranges strand |      tx_id      tx_name
##      <Rle>        <IRanges> <Rle> | <character> <character>
## [1] chr1 [ 67585053, 67587036] + | 14535 ENSMUST00000038824
## [2] chr1 [185321183, 185329396] - | 14535 ENSMUST00000172093
## [3] chr1 [ 86545392, 86582547] - | 14526 ENSMUST00000147148
## [4] chr1 [180945962, 180948838] + | 52581 ENSMUST00000109152
## [5] chr1 [191894074, 191907475] - | 14535 ENSMUST00000148260
## ...
## [185] chr3 [ 35918998, 35930119] - | 14526 ENSMUST00000109152
## [186] chr3 [ 30906985, 30969405] - | 14535 ENSMUST00000167068
## [187] chr3 [121155865, 121171694] - | 52581 ENSMUST00000147148
## [188] chr3 [ 29952782, 29997702] - | 24633 ENSMUST00000033088
## [189] chr3 [ 67430096, 67476529] + | 28623 ENSMUST00000084338
##
## ...
## <2 more elements>
## -----
```

```
## seqinfo: 6 sequences from an unspecified genome
```

5.1.3 Method

The `display()` function in `interactiveDisplay` will start a Shiny web application tailored to the particular supported object passed as an argument. Both the `GRanges` and `GRangesList` data objects can be visualized as follows:

```
display(mmgr)
```

```
display(mmgrl)
```

It is also important to note, the `GRanges` and `GRangesList` methods are designed to send a subset of the submitted object back to the console as a result when the GUI application is exited. If the user wants to store this new object, simply assign it as illustrated in the following examples.

```
new_mmgr <- display(mmgr)
```

```
new_mmgrl <- display(mmgrl)
```

While simple in concept, data cleaning and wrangling are universal to any workflow, so this is a reasonable first implementation of Shiny's capability of returning results back to R.

5.1.4 UI

Unlike other visualization packages that are run in the console and lend themselves to walkthroughs and examples using the `knitr` package, `interactiveDisplay`'s reliance on Shiny moves many of its functional components outside of the R console. This section will be a walkthrough of the user interface controls and features of the applications produced from the `GRanges` and `GRangesList` methods. Besides a couple small exceptions, these two methods are functionally similar and their descriptions have been consolidated together.

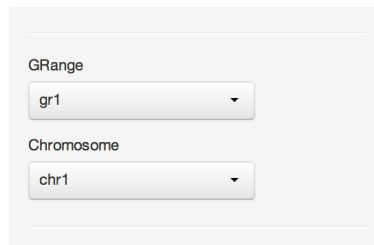


Figure 1: GRange, Chromosome drop-down menus

These dropdown UI elements are used to select a particular `GRanges` and ranges associated with a chosen chromosome (The `GRanges` dropdown is not present in the `GRangesList` method). These ranges will be shown in the **Interactive Plot** and the subsetting operations in the other UI elements will apply to these active ranges.

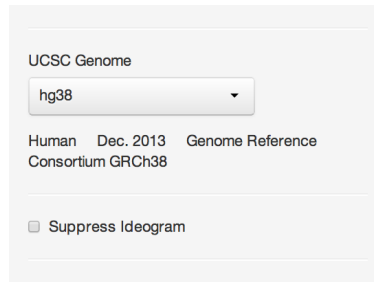


Figure 2: UCSC Genome drop-down, Suppress Ideogram checkbox

The **UCSC Genome** dropdown gives the user choices for the ideogram image shown above the trackplots. This selection is entirely determined by the user and the particular data in the *GRange*/*GRangesList* may not correspond to any of the available choices. This feature also depends on access to remote UCSC servers. Because the correct ideogram may not be available, it can be suppressed via the **Suppress Ideogram** checkbox element.

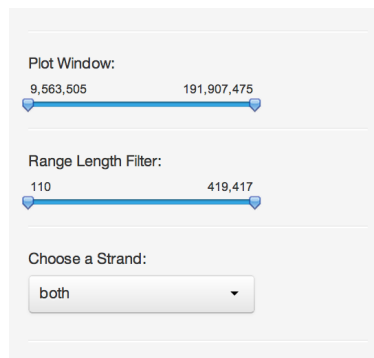


Figure 3: Plot Window Range slider, Length Filter slider, Choose a Strand drop-down

The **Plot Window** and **Range Length Filter** sliders and **Choose a Strand** dropdown provide the user with options for subsetting the original data to only the current ranges in view. The **Plot Window** is reflected by the highlighted region on the ideogram in addition to the trackplot below it. The **Range Length Filter** can be used to filter ranges shown by their respective lengths. The **Choose a Strand** dropdown gives the user a choice of displaying ranges located on positive, negative, or both strands.

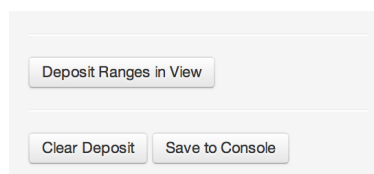


Figure 4: Deposit Ranges in View button, Clear Deposit button, Save to Console button

Besides subsetting which ranges are in the current view, the current subset of ranges can be saved. This is a two step process. Ranges of interest are first deposited, allowing the user to select different chromosomes/*GRanges* to manipulate and add to the list of deposited selections. Once the user is ready to return the data back to the console, **Save to Console** stops the Shiny session and returns the subsetting *GRanges* or *GRangesList* object. **Clear Deposit** resets all selections. The usefulness of this feature is left to the user's individual needs and is also very dependent on the data submitted. Upon inspection, ranges of interest may fall on the same chromosome or chromosome region, share specific metadata tags, or individual lengths. The Shiny UI offers an alternative to filtering away unwanted ranges iteratively in the console with multiple subsetting commands (and repeatedly printing output for validation), while providing instant visual feedback.

5.1.5 Plots

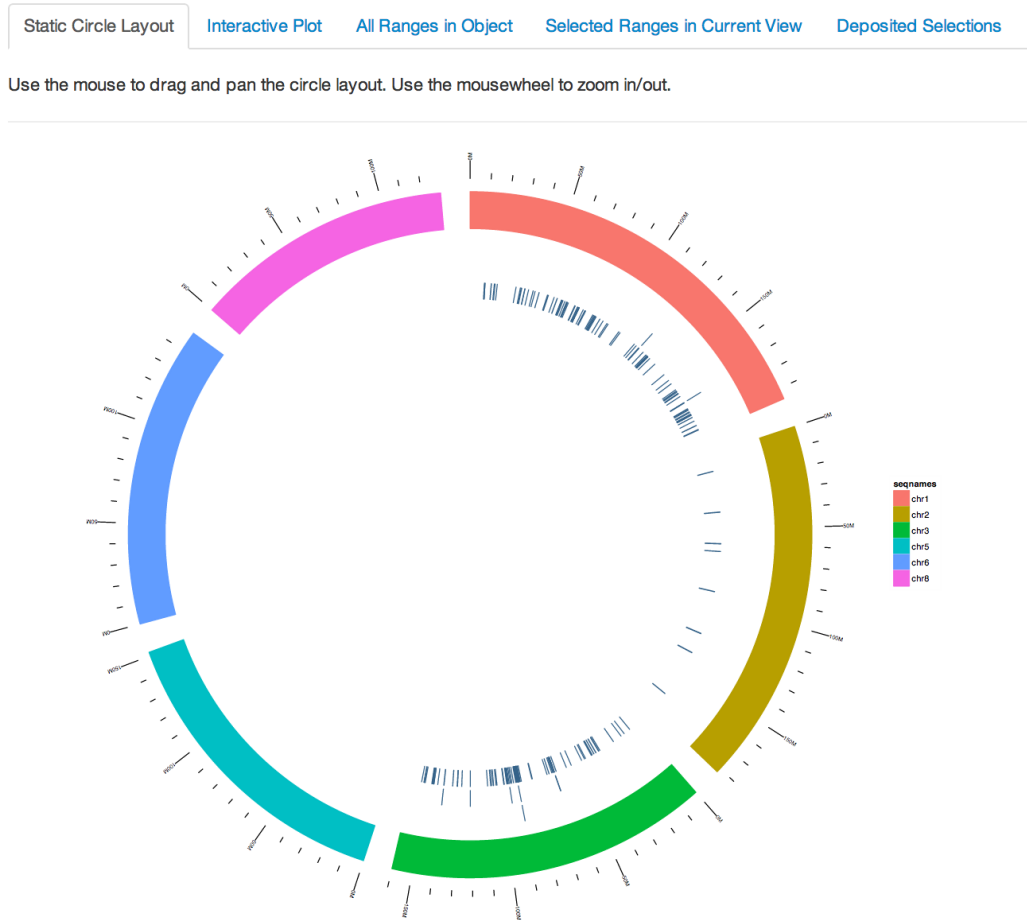


Figure 5: Static Circle Layout

The **Static Circle Layout** is a ggbio [11] based plot is provided for overview purposes and is not intended to represent the user's current subsetting operations. It provides the user with a broad summary of the data they submitted in its unaltered form.

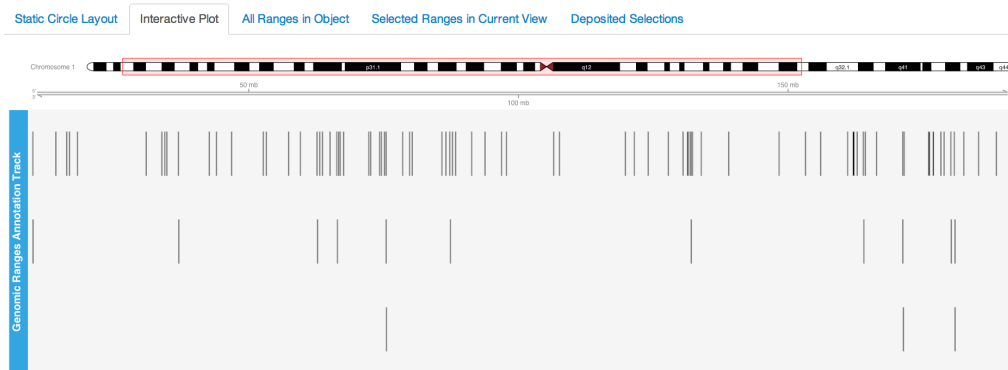


Figure 6: Interactive Plot

The **Interactive Plot** is the main view for these two methods. Trackplots are drawn with the Bioconductor package Gviz [3].

seqnames	start	end	width	strand	tx_id	tx_name
chr1	67585053	67587036	1984	+	14535	ENSMUST00000038824
chr1	185321183	185329396	8214	-	14535	ENSMUST00000172093
chr1	86545392	86582547	37156	-	14526	ENSMUST00000147148
chr1	180945962	180948838	2877	+	52581	ENSMUST00000109152
chr1	191894074	191907475	13402	-	14535	ENSMUST00000148260
chr1	87264363	87310836	46474	+	27296	ENSMUST00000144433
chr1	88318913	88388851	69939	+	37251	ENSMUST00000109152
chr1	166393610	166409391	15782	-	52581	ENSMUST00000172093

Figure 7: All Ranges in Object

Using Shiny’s advanced datatables, this is a searchable, sortable table of all ranges contained in the current *GRanges*. In the case of the *GRanges* method, this table contains all ranges in the object, and in the *GRangesList* method the table contains ranges in the current active *GRanges* selected from the dropdown.

seqnames	start	end	width	strand	tx_id	tx_name
chr8	12757016	12868728	111713	+	27296	ENSMUST00000109152
chr8	3640764	3642022	1259	+	52581	ENSMUST00000033088
chr8	12873948	12890108	16161	+	14526	ENSMUST00000147148
chr8	3587450	3609074	21625	+	52581	ENSMUST00000144433
chr8	3623371	3625545	2175	-	52581	ENSMUST00000033088
chr8	3707064	3717553	10490	-	27296	ENSMUST00000121813

Figure 8: Selected Ranges in Current View

This table is similar to the previous view, except it reflects the current state of subsetting operations performed by the UI and what is currently displayed in the trackplot.

GRRange	Chromosome	Strand	Min Position	Max Position	Min Width	Max Width
gr3	chr8	both	3567990	13018632	787	366409
gr2	chr6	+	3570697	36937958	103	200183
gr2	chr5	-	24428263	145141662	107	166648
gr1	chr1	both	9563505	191907475	110	419417

Figure 9: Deposited Selections

This table view doesn’t show individual ranges, instead it gives a summary of selected ranges that have been locked in with the **Deposit Ranges in View** button. Here the user can keep track of sets of ranges of interest that can be sent back to the console when the application is closed.

5.1.6 Metadata Tabset

tx_id tx_name

Select tx_name

- ENSMUST0000033088
- ENSMUST0000038824
- ENSMUST0000084338
- ENSMUST0000109152
- ENSMUST0000121813
- ENSMUST0000144433
- ENSMUST0000147148
- ENSMUST0000148260
- ENSMUST0000167068
- ENSMUST0000172093

Figure 10: Dynamically Created Metadata Tabs

The lower tabset consists of individual tabs that are dynamically produced based on the metadata contents of the object submitted. Each tab has a list of checkboxes that allow the user to subset the selection based on the metadata. The subsetting is applied across all deposited selections. The usefulness of this panel really depends on the content of the object submitted. Objects containing no metadata columns obviously have no use for this UI, but metadata rich objects with categorical, biologically relevant labels can potentially be subset quickly according to them.

5.2 ExpressionSet

5.2.1 Object Background

The *ExpressionSet* class is a standardized container for gene expression data, specifically from a microarray.

```
data(expr)
expr

## ExpressionSet (storageMode: lockedEnvironment)
## assayData: 500 features, 26 samples
##   element names: exprs, se.exprs
## protocolData: none
## phenoData
##   sampleNames: A B ... Z (26 total)
##   varLabels: sex type score
##   varMetadata: labelDescription
## featureData: none
## experimentData: use 'experimentData(object)'
## Annotation: hgu95av2
```

We can view the expression values with the `exprs()` function.

```
exprs(expr)[1:10,1:7]

##           A           B           C           D           E           F
## AFX-MurIL2_at 192.7420  85.75330 176.7570 135.57500  64.49390  76.35690
## AFX-MurIL10_at  97.1370 126.19600  77.9216  93.37130  24.39860  85.50880
## AFX-MurIL4_at  45.8192  8.83135  33.0632  28.70720  5.94492  28.29250
## AFX-MurFAS_at  22.5445  3.60093  14.6883  12.33970  36.86630  11.25680
## AFX-BioB-5_at  96.7875 30.43800  46.1271  70.93190  56.17440  42.67560
## AFX-BioB-M_at  89.0730 25.84610  57.2033  69.97660  49.58220  26.12620
```

```
## AFFX-BioB-3_at 265.9640 181.08000 164.9260 161.46900 236.97600 156.80300
## AFFX-BioC-5_at 110.1360 57.28890 67.3980 77.22070 41.34880 37.97800
## AFFX-BioC-3_at 43.0794 16.80060 37.6002 46.52720 22.24750 61.64010
## AFFX-BioDn-5_at 10.9187 16.17890 10.1495 9.73639 16.90280 5.33328
##
## G
## AFFX-MurIL2_at 160.5050
## AFFX-MurIL10_at 98.9086
## AFFX-MurIL4_at 30.9694
## AFFX-MurFAS_at 23.0034
## AFFX-BioB-5_at 86.5156
## AFFX-BioB-M_at 75.0083
## AFFX-BioB-3_at 211.2570
## AFFX-BioC-5_at 110.5510
## AFFX-BioC-3_at 33.6623
## AFFX-BioDn-5_at 25.1182
```

The structure of the *ExpressionSet* object [4]:

- expression data (*assayData*)
- sample metadata (*phenoData*)
- annotations and instrument metadata (*featureData*, *annotation*)
- sample protocol (*protocolData*)
- experimental design (*experimentData*)

5.2.2 Method

```
display(expr)
```

5.2.3 UI

The method for *ExpressionSet* has the most features of any of the current objects handled by *interactiveDisplay*. The main panel consists of three tabs that visualize the data as a heatmap, network and dendrogram. Gene ontology summaries of probes or selected probe clusters are available in tables in the lower tabset of the main panel.

Experiment Info	
name	Pierre Fermat
lab	Francis Galton Lab
contact	pfermat@lab.not.exist
title	Smoking-Cancer Experiment
url	www.lab.not.exist

Figure 11: Experiment Info

The Experiment Info table at the top of the sidebar is entirely dependent on whether the *ExpressionSet* object submitted has these fields filled out.



Figure 12: Suppress Heatmap checkbox, Transpose Heatmap checkbox

Depending on whether the parameter `sflag=FALSE` is passed to the `display()` method and the selected dimensions of the *ExpressionSet*, replotting the heatmap can introduce delays. Using the checkbox to suppress the heatmap plotting can circumvent this. Also, depending on the relative dimensions of probes/samples, transposing the plot can make better use of the space available.

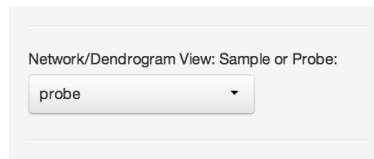


Figure 13: Network/Dendrogram View dropdown

This UI element simply toggles between displaying plots that represent distances/clustering across probes or samples.

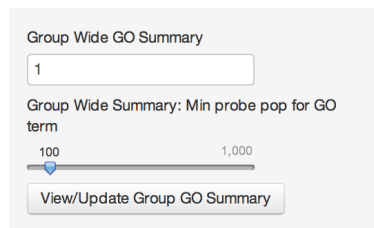


Figure 14: Group Wide GO Summary UI

This set of UI elements can be used to provide a gene ontology summary of a chosen cluster of probes in the network view. Simply mouseover a node within a cluster of interest and the cluster number will pop-up. Input that cluster number into the input field and hit the **View/Update GO Summary** button. This can take 10-30 seconds, which is why this is not automatically reactive. Adjusting the Minimum probe population for GO term allows the user to explore general or specific top ranking terms. The summary table is located in the second tab of the lower tabset.


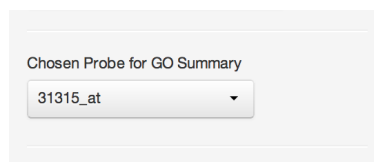


Figure 15: Individual Probe GO Summary dropdown

This drop-down contains options from the current subset of probes being visualized. Selecting a probe refreshes the first tab of the lower tabset with a GO summary for that probe, as well as associated gene names and Entrez IDs. When toggled to probe view, clicking on a probe node in the network view also refreshes this selection and may be more convenient.

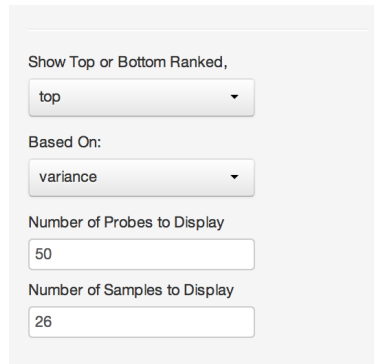

Subset UI form with the following controls:

- Show Top or Bottom Ranked: dropdown menu with 'top' selected.
- Based On: dropdown menu with 'variance' selected.
- Number of Probes to Display: text input field with '50'.
- Number of Samples to Display: text input field with '26'.

Figure 16: Subset UI


This UI set is used for subsetting the submitted *ExpressionSet* object. The initial values are set to the maximum number of samples and to a very conservative 20 probes. The user is free to expand out to the full dimensions.



Tweak Axis Label Font Size slider with a range from -1 to 1 and a current value of 0.7.

Figure 17: Tweak Axis Label Font Size slider

Depending on the dimensions of the *ExpressionSet* object submitted/subset, it may be necessary to adjust label sizes to prevent label overlapping or illegibly small text.

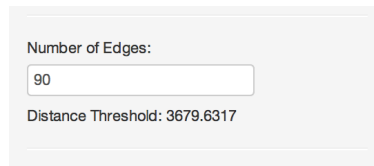


Edge/Distance UI form with the following controls:

- Number of Edges: text input field with '90'.
- Distance Threshold: 3679.6317 (displayed below the input field).

Figure 18: Edge/Distance UI

This UI element is used in the network view, allowing the user to determine the number of edges and the distance threshold represented in the graph.

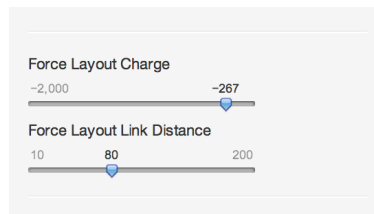


Force Layout sliders with the following controls:

- Force Layout Charge: slider with a range from -2,000 to -267 and a current value of -267.
- Force Layout Link Distance: slider with a range from 10 to 200 and a current value of 80.

Figure 19: Force Layout sliders

This is a cosmetic control for the force directed graph, which allows the user to adjust how nodes spread themselves out and the length of their edges.

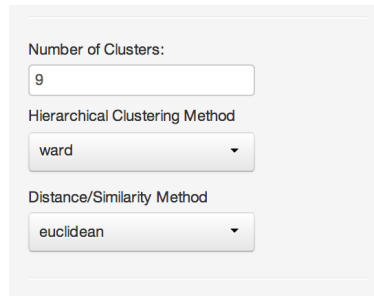


Number of Clusters:
9

Hierarchical Clustering Method
ward

Distance/Similarity Method
euclidean

Figure 20: Clustering UI

These controls set the parameters for the distance and hierarchical clustering methods used. Only base R methods are currently implemented but more may be included in future releases as well as possible option of allowing the user to manually provide their own via a textbox element.

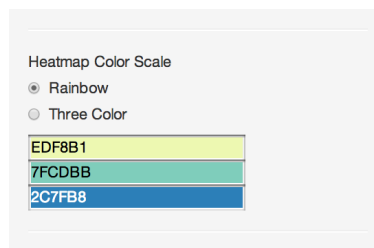

Heatmap Color Scale

Rainbow

Three Color


EDF8B1

7FCDBB

2C7FB8

Figure 21: Color Picker UI

These elements affect the coloration of the heatmap. The color picker for the tricolor scale is not provided by the Shiny framework. This uses an additional JavaScript library which will be discussed in a later section. This is not just a cosmetic option, different modes can better visualize different data and accommodate color blind users.



Stop Application

Figure 22: Stop Application button

This stops the application. The *ExpressionSet* method does not currently return any data back to the R console.

5.2.4 Plots

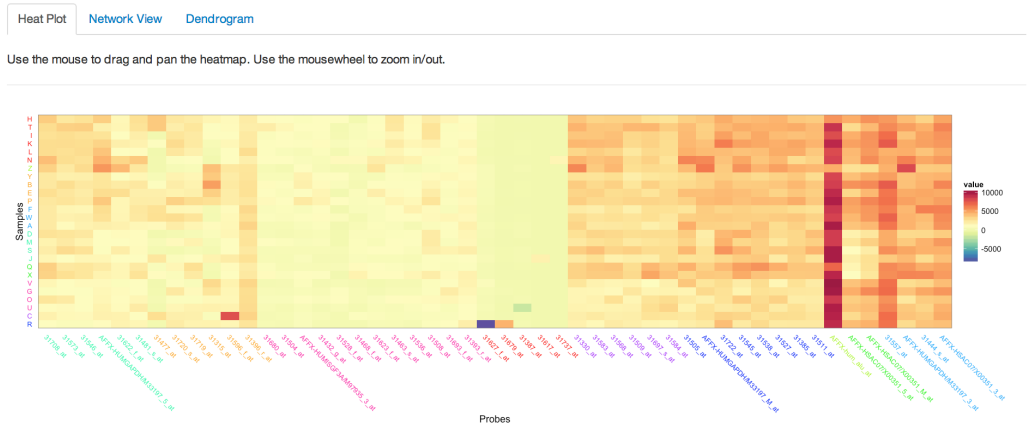


Figure 23: Heat Plot

Many packages on CRAN and Bioconductor have specialized heatmap functions, HeatPlus [6] has a specific function for *ExpressionSet* objects. Given that one of the goals of this package is modularity and reuse of code, the more generic plotting package ggplot2 [10] was used instead of other options. Often heatmap and dendrogram plots are paired together but given that there is a great deal of screen real estate taken up by tables, UI controls and on-screen documentation, the dendrograms are moved to a separate tab.

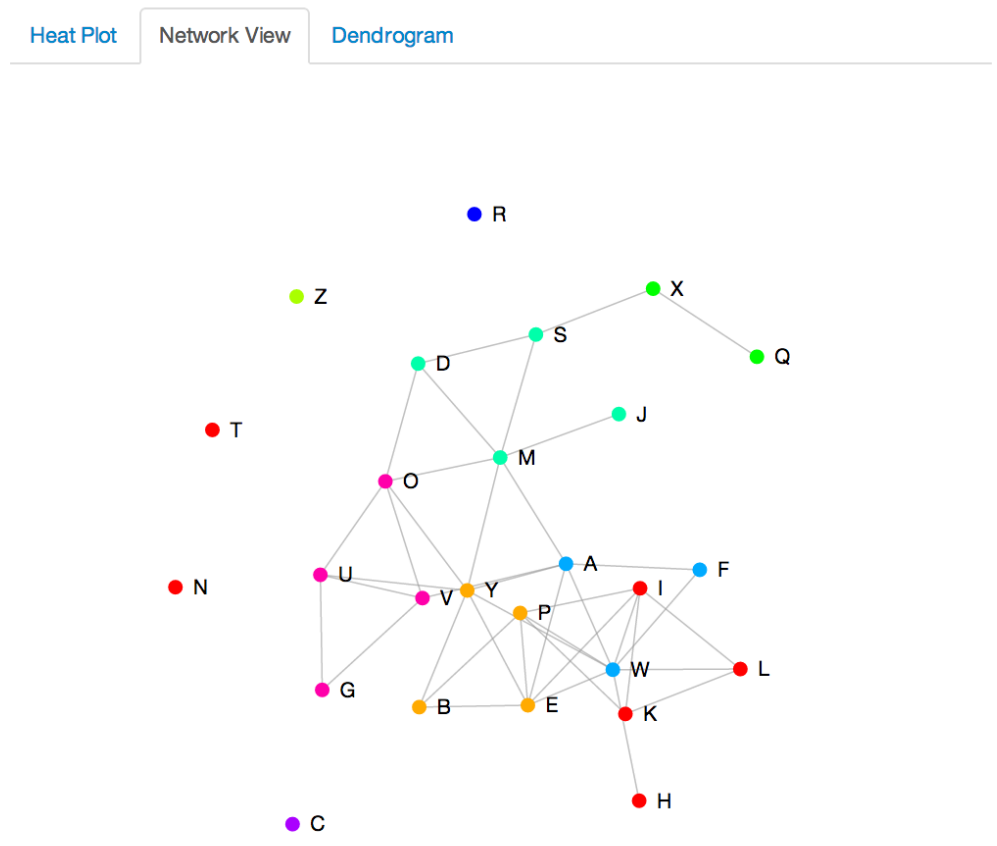


Figure 24: Network View - Samples

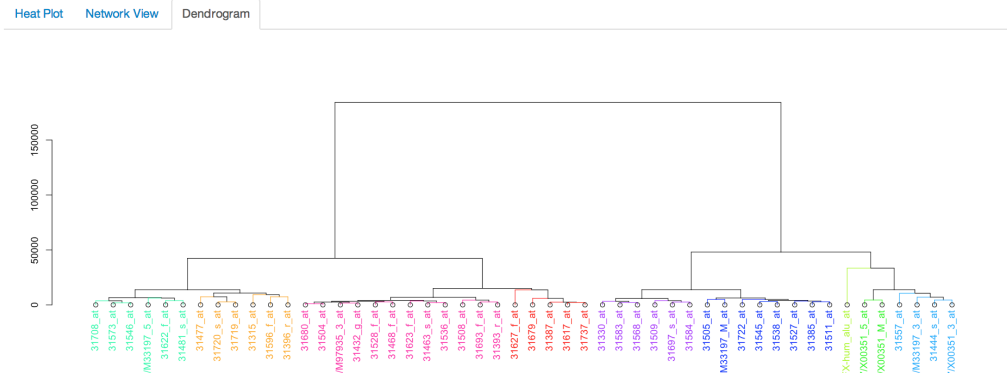


Figure 27: Dendrogram - Probes

The decision to separate the dendrogram plots from the heatmap was a difficult one, paired heatmap/dendrogram plots quickly convey clustering groupings alongside the data that they were generated from. However, due to the forementioned design/layout constraints, dendrograms are placed in their own tab. This keeps the already complex UI as clean as possible with adequate space for all plots. To accommodate this decision some care was taken to keep some consistency between views. The clustering colors are consistent across the three views and the sample/probe order is the same between the heatmap and dendrogram views. This consistency helps the user quickly switch between tabs and stay oriented with the data they are examining.

5.2.5 GO Tabset

Individual Probe GO Summary
Probe Cluster GO Summary

Use the sidebar drop-down or simply click on probe nodes in the force layout plot in the Network View tab to view a gene ontology summary if available.

PROBEID	ENTREZID	GENENAME
31330_at	6223	ribosomal protein S19

10 records per page
Search:

GOID	TERM
GO:0000028	ribosomal small subunit assembly
GO:0000184	nuclear-transcribed mRNA catabolic process, nonsense-mediated decay
GO:0000462	maturation of SSU-rRNA from tricistronic rRNA transcript (SSU-rRNA, 5.8S rRNA, LSU-rRNA)
GO:0002548	monocyte chemotaxis
GO:0003735	structural constituent of ribosome
GO:0005515	protein binding
GO:0005730	nucleolus
GO:0005737	cytoplasm
GO:0005829	cytosol
GO:0005829	cytosol

Showing 1 to 10 of 40 entries

Figure 28: Individual Probe GO Summary

These summary tables provide Entrez ID and gene names for the selected probe and the top ranking results for GO descriptors. This table allows the user to manually choose and characterize probes that could be exhibiting differential expression in the submitted expressionSet.

Individual Probe GO Summary **Probe Cluster GO Summary**

10 records per page Search:

rownames(result)	assayed	significant	universe	representation	p	odds	expected
structural constituent of ribosome	107	4	103043	over	0.0000052219	38.772	0.11111
SRP-dependent cotranslational protein targeting to membrane	108	4	103043	over	0.0000056222	38.029	0.1132
viral life cycle	117	4	103043	over	0.000010598	32.207	0.13285
nuclear-transcribed mRNA catabolic process, nonsense-mediated decay	122	4	103043	over	0.000014743	29.533	0.14444
translational initiation	131	4	103043	over	0.000025791	25.491	0.16654
microtubule cytoskeleton	104	2	103043	over	0.005053	19.769	0.10497
ribonucleoprotein complex	144	2	103043	over	0.017542	10.192	0.20124
translation	215	4	103043	over	0.0011314	9.2196	0.4486
microtubule binding	154	2	103043	over	0.022542	8.8934	0.23016
glucose metabolic process	157	2	103043	over	0.024214	8.552	0.23921

rownames(result) assayed significant universe representation p odds expected

Showing 1 to 10 of 314 entries

← Previous 1 2 3 4 5 Next →

Figure 29: Probe Cluster GO Summary

This tab provides a table of the results of the `hyperg()` function from the `GOstats` package [2]. Ranked in order of p-value, the results give a general GO summary across the group of selected probes. Much like the previous table, this provides an interactive tool for characterizing differentially expressed sets of probes.

5.3 RangedSummarizedExperiment

5.3.1 Object Background

```
data(se)
se

## Loading required package: SummarizedExperiment
## Loading required package: DelayedArray
## Loading required package: matrixStats
##
## Attaching package: 'matrixStats'
## The following objects are masked from 'package:Biobase':
##
##   anyMissing, rowMedians
##
## Attaching package: 'DelayedArray'
## The following objects are masked from 'package:matrixStats':
##
##   colMaxs, colMins, colRanges, rowMaxs, rowMins, rowRanges
## The following object is masked from 'package:base':
##
```

```
## apply
```

The *RangedSummarizedExperiment* class is similar to a dataframe where rows represent ranges (using *GRanges/GRangesList*) and columns represent samples (with sample data summarized as a dataframe). It can contain one or more assays. Ranges have read counts associated with them [4].

5.3.2 Method

```
display(se)
```

5.3.3 UI

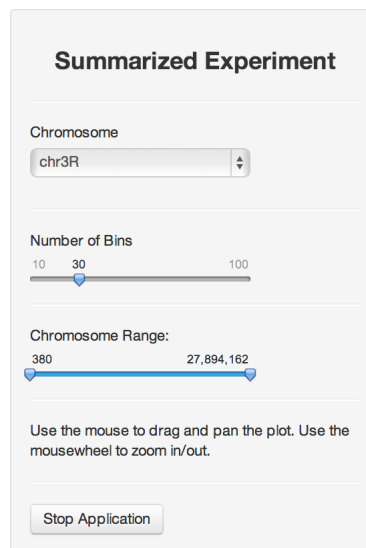


Figure 30: *RangedSummarizedExperiment* UI

The UI for the *RangedSummarizedExperiment* method is relatively simple. It is the best candidate of the existing methods for future development. The *RangedSummarizedExperiment* class is widely used, data rich object and has a lot of potential for improvement.

5.3.4 Plot

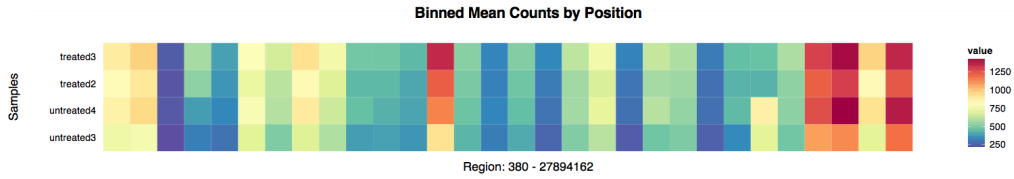


Figure 31: Binned Mean Counts by Position

Currently the plot gives a simple depiction of expression score/counts across regions of the selected chromosome. However, this plot currently obfuscates the relative coverage of the ranges of interest. It will likely need to be replaced with a multiple track plot in future releases.

6 Additional Functions/Methods

6.1 Dataframe - display()

```
display(mtcars)
```

Similar to the GRanges and GRangesList methods, the dataframe method can send a subset of the submitted object back to the console and can be stored in a new variable.

```
new_mtcars <- display(mtcars)
```

Data Tables binding

Send Rows
Shift-Click to select multiple rows.

Select All Rows
Click to select all rows on page

Deselect All Rows
Click to deselect all rows on page

Show entries Search:

mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
21	6	160	110	3.9	2.62	16.46	0	1	4	4
21	6	160	110	3.9	2.875	17.02	0	1	4	4
22.8	4	108	93	3.85	2.32	18.61	1	1	4	1
21.4	6	258	110	3.08	3.215	19.44	1	0	3	1
18.7	8	360	175	3.15	3.44	17.02	0	0	3	2
18.1	6	225	105	2.76	3.46	20.22	1	0	3	1
14.3	8	360	245	3.21	3.57	15.84	0	0	3	4
24.4	4	146.7	62	3.69	3.19	20	1	0	4	2
22.8	4	140.8	95	3.92	3.15	22.9	1	0	4	2
19.2	6	167.6	123	3.92	3.44	18.3	1	0	4	4
17.8	6	167.6	123	3.92	3.44	18.9	1	0	4	4
16.4	8	275.8	180	3.07	4.07	17.4	0	0	3	3
17.3	8	275.8	180	3.07	3.73	17.6	0	0	3	3
15.2	8	275.8	180	3.07	3.78	18	0	0	3	3
10.4	8	472	205	2.93	5.25	17.98	0	0	3	4

Figure 32: Dataframe Table

Despite the dataframe being a base R object and not exclusive to use with Bioconductor software, it's still useful to write methods for base R objects with genomic workflows in mind. The Bioconductor package AnnotationHub imports this dataframe method. This method makes use of Shiny's new advanced datatables with a slight modification to return selected rows back to the console.

is a possibility for other biologists to contribute to the open source development. Shiny provides the web service and predefined UI elements, but relies on existing R packages to provide the data analysis and plotting. The interactivity of Shiny apps depends on its reactive programming model.

<http://shiny.rstudio.com/>

7.2 Gviz/ggbio

Gviz and ggbio provide the biology specific plots in the *GRanges* and *GRangesList* methods in interactiveDisplay. Both offer track-based plotting methods for genomic data. Gviz was the initial choice for *GRanges/GRangesList* trackplots because it offered more generic, extensible plotting. Later in development, ggbio plotting was also added as it handles additional complex plotting methods.

7.3 gridSVG

Simon Potter's gridSVG [5] is an important asset in developing interactive R plots. His package converts a grid [7] based plot to SVG format directly. Two major plotting packages for R, lattice [9] and ggplot2 are built around grid (and many other packages depend on ggplot2), which gives gridSVG a lot of potential interaction with many Bioconductor libraries.

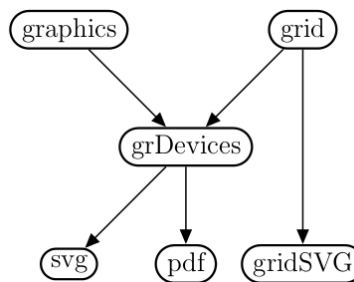


Figure 34: gridSVG [5]

8 JavaScript Libraries

8.1 Data-Driven Documents

Michael Bostock's JavaScript library, D3.js (<http://d3js.org/>), allows for highly customizable data visualizations using universal web standards. It can work along with Shiny to bind data to the Document Object Model (DOM). Unlike Shiny which handles the interactive elements but leaves R to handle the visualization, D3.js can handle both. Currently only the *ExpressionSet* method's Network View makes use of this library.

8.2 Zoom/Pan JavaScript libraries

This Zoom/Pan library is used in all four main `display()` methods and in `gridsvgjs()`. While a relatively simple feature, hopefully it will lead to more complex JavaScript interactivity that directly manipulates plots produced by R plotting packages. The Andrea Leofreddi's original JavaScript code was expanded upon by John Krauss to produce the version of this library used in interactiveDisplay.

Andrea Leofreddi

<https://code.google.com/p/svgpan/>

John Krauss

<https://github.com/talos/jquery-svgpan>

8.3 JavaScript Color Chooser

The colorpicker included in the *ExpressionSet* method should eventually be moved into the Shiny package itself. Many R users outside of the Bioconductor community use RColorBrewer and could make use of this UI element in their Shiny based applications.

Jan Odvarko

<http://jscolor.com/>

9 Acknowledgments

Shiny

Joe Cheng and Winston Chang

<http://www.rstudio.com/shiny/>

Force Layout

Jeff Allen

<https://github.com/trestletech/shiny-sandbox/tree/master/grn>

gridSVG

Simon Potter

<http://sjp.co.nz/projects/gridsvg/>

Zoom/Pan JavaScript libraries

John Krauss

<https://github.com/talos/jquery-svgpan>

Andrea Leofreddi

<https://code.google.com/p/svgpan/>

JavaScript Color Chooser

Jan Odvarko

<http://jscolor.com/>

Data-Driven Documents

Michael Bostock

<http://d3js.org/>

10 SessionInfo

```
sessionInfo()
## R version 3.4.0 (2017-04-21)
## Platform: x86_64-pc-linux-gnu (64-bit)
## Running under: Ubuntu 16.04.2 LTS
##
## Matrix products: default
## BLAS: /home/biocbuild/bbs-3.5-bioc/R/lib/libRblas.so
## LAPACK: /home/biocbuild/bbs-3.5-bioc/R/lib/libRlapack.so
##
```



```
## locale:
## [1] LC_CTYPE=en_US.UTF-8      LC_NUMERIC=C
## [3] LC_TIME=en_US.UTF-8       LC_COLLATE=C
## [5] LC_MONETARY=en_US.UTF-8   LC_MESSAGES=en_US.UTF-8
## [7] LC_PAPER=en_US.UTF-8     LC_NAME=C
## [9] LC_ADDRESS=C              LC_TELEPHONE=C
## [11] LC_MEASUREMENT=en_US.UTF-8 LC_IDENTIFICATION=C
##
## attached base packages:
## [1] stats4      grid        parallel    stats       graphics    grDevices   utils
## [8] datasets    methods     base
##
## other attached packages:
## [1] SummarizedExperiment_1.6.0 DelayedArray_0.2.0
## [3] matrixStats_0.52.2       GenomicRanges_1.28.0
## [5] GenomeInfoDb_1.12.0      IRanges_2.10.0
## [7] S4Vectors_0.14.0         Biobase_2.36.0
## [9] interactiveDisplay_1.14.0 BiocGenerics_0.22.0
## [11] ggplot2_2.2.1            knitr_1.15.1
##
## loaded via a namespace (and not attached):
## [1] genefilter_1.58.0         reshape2_1.4.2
## [3] splines_3.4.0            lattice_0.20-35
## [5] colorspace_1.3-2        htmltools_0.3.5
## [7] Category_2.42.0          interactiveDisplayBase_1.14.0
## [9] XML_3.98-1.6             RBGL_1.52.0
## [11] survival_2.41-3         DBI_0.6-1
## [13] RColorBrewer_1.1-2       GenomeInfoDbData_0.99.0
## [15] plyr_1.8.4               stringr_1.2.0
## [17] zlibbioc_1.22.0         munsell_0.4.3
## [19] gtable_0.2.0            memoise_1.1.0
## [21] evaluate_0.10           httpuv_1.3.3
## [23] AnnotationDbi_1.38.0    highr_0.6
## [25] GSEABase_1.38.0         Rcpp_0.12.10
## [27] xtable_1.8-2            scales_0.4.1
## [29] graph_1.54.0            annotate_1.54.0
## [31] XVector_0.16.0          mime_0.5
## [33] digest_0.6.12           stringi_1.1.5
## [35] shiny_1.0.2             RJSONIO_1.3-0
## [37] gridSVG_1.5-0           tools_3.4.0
## [39] bitops_1.0-6            magrittr_1.5
## [41] lazyeval_0.2.0         RCurl_1.95-4.8
## [43] tibble_1.3.0           RSQLite_1.1-2
## [45] Matrix_1.2-9           R6_2.2.0
## [47] compiler_3.4.0
```

11 References

- [1] Marc Carlson and Sonali Arora. *AnnotationHub: A client for retrieving Bioconductor objects from AnnotationHub*. R package version 1.4.0.

- [2] S Falcon and R Gentleman. Using GOSTats to test gene lists for GO term association. *Bioinformatics*, 23(2):257–8, 2007.
- [3] Florian Hahne, Steffen Durinck, Robert Ivanek, Arne Mueller, Steve Lianoglou, and Ge Tan. *Gviz: Plotting data and annotation information along genomic coordinates*. R package version 1.8.2.
- [4] Michael Lawrence, Wolfgang Huber, Hervé Pagès, Patrick Aboyoun, Marc Carlson, Robert Gentleman, Martin Morgan, and Vincent Carey. Software for computing and annotating genomic ranges. *PLoS Computational Biology*, 9, 2013.
- [5] Paul Murrell and Simon Potter. *gridSVG: Export grid graphics as SVG*, 2013. R package version 1.4-0.
- [6] Alexander Ploner. *Heatplus: Heatmaps with row and/or column covariates and colored clusters*, 2014. R package version 2.11.0.
- [7] R Core Team. *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria, 2013.
- [8] RStudio and Inc. *shiny: Web Application Framework for R*, 2014. R package version 0.9.1.
- [9] Deepayan Sarkar. *Lattice: Multivariate Data Visualization with R*. Springer, New York, 2008. ISBN 978-0-387-75968-5.
- [10] Hadley Wickham. *ggplot2: elegant graphics for data analysis*. Springer New York, 2009.
- [11] Tengfei Yin, Dianne Cook, and Michael Lawrence. ggbio: an r package for extending the grammar of graphics for genomic data. *Genome Biology*, 13(8):R77, 2012.